**P52 Stainless Steel Regulator** and Filter/Regulator



#### **Features**

- Low Droop
- Tapped Vent
- Excellent Stability
- Port Sizes from 1/4" up to 1"

#### **Applications**

- Sour Gas
- Corrosive Environments
- Off Shore

The P52SS regulator is designed for service with a wide variety of corrosive gases and severe environments. It is the ideal choice for sour gas applications and where a corrosive environment is present.

The standard version of this regulator is relieving with no constant bleed. You must specify if a non-relieving regulator is required.


Key components to the filter / regulator include a built in dripwell, 25 micron stainless filter. Both the regulator and filter / regulator come standard with Viton elastomers and a 'T' handle adjustment.

## **Specifications**

Maximum Inlet Pressure	425 PSIG
Outlet Ranges	3 - 30 PSIG
	6 - 60 PSIG
	12 - 125 PSIG
	15 - 150 PSIG
Repeatability	± 0.25 PSIG
	1/4" - 38 SCFM
Flow Rates	3/8" - 42 SCFM
at 100 PSIG Inlet	1/2" - 95 SCFM
20 PSIG Outlet	3/4" - 105 SCFM
	1" - 105 SCFM
Temperature Range	-4 to 176°F
Exhaust Capacity	0.1 SCFM
Max Air Consumption	0.5 SCFH
Filter	25 Micron
Supply Pressure Sensitivity at 25 PSIG	± 1.0 PSIG Change in Output
	316 SS Housing
Material	Body and Filter,
	Viton Elastomers


# **Mounting Bracket**

607-309-000

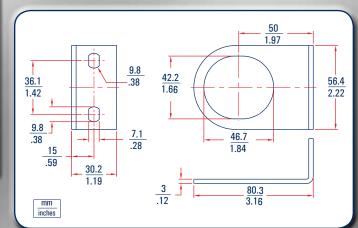

### **P52SS Part Matrix**

P052SS					
	<b>A</b>	<b>A</b>	<b>A</b>	<b>A</b>	Style
_	RX				Regulator
	FR				Filter Regulator with Manual Drain
	AR				Filter Reg with Auto Drain
					Body Size
		02			1/4 NPT
		03			3/8 NPT
		04			1/2 NPT
		06			3/4 NPT
		80			1 NPT
	-	_			Output Ranges
			030		3 - 30 PSIG
			060		6 - 60 PSIG
			125		12 - 125 PSIG
			150		15 - 150 PSIG
					Options
				00	Standard
				0B	Non-relieving
				OF	5 Micron Filter
				BF	Non-relieving & 5 Micron Filter
				ОН	Hex Head Adjustment
				BH	Non-relieving Hex Head Adjustment 5 Micron Filter and Hex Head
				СС	Non-relieving Hex Head
					and 5 Micron Filter

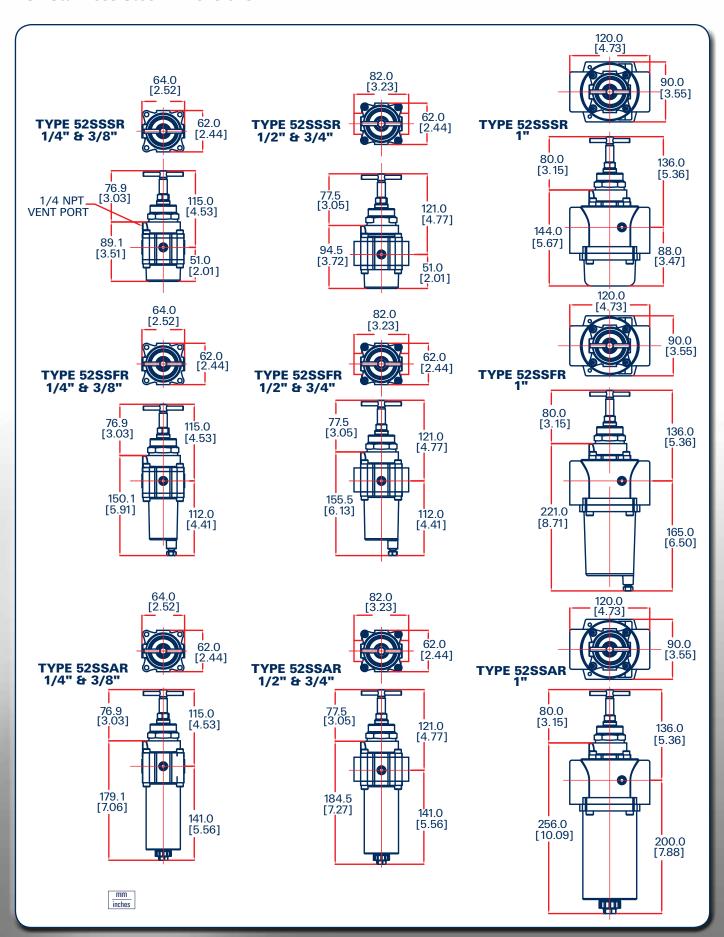

4